

XM8500

ULTRAVOICE®



Technical Specifications

Version 1.2 May 2000

ENGLISH


DYNAMIC VOCAL MICROPHONE

FEATURES

- ▲ Dynamic vocal microphone with smooth mid-frequency presence rise for excellent vocal projection
- ▲ Shock mount system to cut down handling noise
- ▲ Cardioid characteristic minimizes background noise and feedback
- ▲ Integrated spherical wind and pop noise filter
- ▲ Ultra-low distortion for a super clean sound
- ▲ Microphone stand adapter included
- ▲ Super rugged construction

SPECIFICATIONS

Type	cardioid dynamic microphone
Impedance	150 Ohms
Sensitivity	- 70 dB
Bandwidth	50 Hz to 15 kHz
Connector	gold-plated XLR
Weight	approx. 240 g

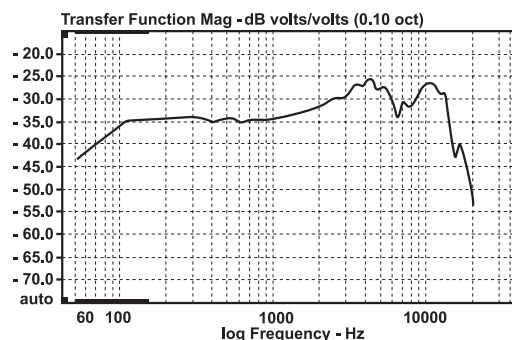

BEHRINGER is constantly striving to maintain the highest professional standards. As a result of these efforts, modifications may be made from time to time to existing products without prior notice. Specifications and appearance may differ from those listed or illustrated.

The information contained in this sheet is subject to change without notice. No part of this sheet may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording of any kind, for any purpose, without the express written permission of BEHRINGER Spezielle Studiotechnik GmbH.

BEHRINGER and ULTRAVOICE are registered trademarks. ALL RIGHTS RESERVED.

© 2000 BEHRINGER Spezielle Studiotechnik GmbH.

BEHRINGER Spezielle Studiotechnik GmbH, Hanns-Martin-Schleyer-Str. 36-38, 47877 Willich-Münchheide II, Germany
Tel. +49 (0) 21 54 / 92 06-0, Fax +49 (0) 21 54 / 92 06-30



www.behringer.com