

5 cm



## RECEIVER TRANSMITTER 2-SLOT CHARGER



### WIRELESS TOUR GUIDE SYSTEM

#### Important Caution


- \* Always make all connections before plugging the unit into an AC power outlet.
- \* Do not leave the devices in a place with high temperature or high humidity.
- \* Always do not handle the power cord with wet hands !
- \* Keep the devices away from fire and heat sources.
- \* Please fully charge the battery 8 hours before first operation, and recharge if no use for over three months.

#### Feature

- \* Handy and fashion outward.
- \* Preset 16 selectable UHF channels.
- \* Using Lithium cell to provide long operation time.
- \* Transmitter with built in condenser capsule.
- \* LED display on both transmitters and receivers.
- \* 2-slots Charger provides 2 slots.
- \* 2 way of wearing, neck-set and belt-pack.
- \* 60m operation distance.

#### Parts Identification


##### RECEIVER / TRANSMITTER



##### Bottom Panel



##### Left Side Panel

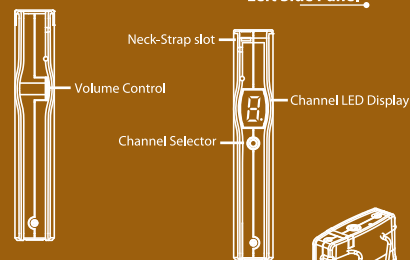


##### Right Side Panel

##### Back Panel





#### Parts Identification

##### 2-SLOTS CHARGER

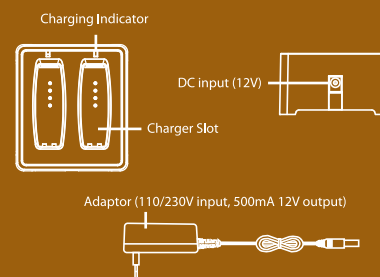

##### Accessories

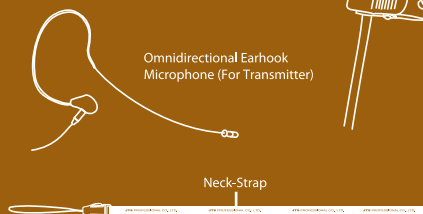

#### Specification

##### RECEIVER

Frequency Preparation	PLL Synthesized Control
Carrier Frequency Range	502MHz~960MHz
LED Display	Channel
Controls	Power On/Off, Channel selection
Audio Frequency Response	Volume control
Output connector	40Hz~18kHz
Battery life	ø3.5 Dummy stereo Phone Jack, Compatible with stereo plug
Battery	14 hours typical
Dimension(mm)	Lithium cell
	54mm(W)* 17mm(D)* 99mm(H)

##### TRANSMITTER

Internal Microphone	Cardioid Condenser Microphone
Frequency Preparatio	PLL Synthesized Control
Carrier Frequency Rang	502MHz~960MHz
RF Output	10mW
Stability	±0.005%
Frequency Deviation	±48kHz
LED Display	Channel
Controls	Power On/Off, Channel selection
Spurious Emissions	Volume control
Audio Frequency Response	<-50 dBC
Microphone input connector	40Hz~18kHz
Battery life Operation Time	ø3.5 Mono Phone Jack
Battery	14 hours typical
Dimension(mm)	Lithium cell
	54mm(W)* 17mm(D)* 99mm(H)

##### 2-SLOT CHARGER

Number of charging slot	2 (receiver or transmitter)
Power requirement	12-18 VDC, 500mA
LED Indicator	Power connected: Flash green
	Charging : Green
	Full Charged ; Turn off
Dimensions(mm)	85mm(W)* 75mm(D)* 41mm(H)