

TA15

ACTIVE SUBWOOFER

User Manual

Safety Precautions

Flying and installation of this speaker cabinet must be carried out by suitably qualified personnel following the approved safety standards.

Do not attempt to clean the plastic enclosure with solvents or petrochemical based cleaners.

Do not place objects which are sources of heat on the speaker cabinet such as lighting equipment or smoke machines.


Do not expose the speaker cabinet to direct precipitation or stand in water. Liquid getting into the box will risk a short circuit and will be hazardous.

Do not stack the speaker cabinet in a manner that could cause injury should a cabinet become dislodged.

Attention

Before connecting or operating your new THOMANN MUSIKHAUS speaker, please study the accompanying instruction manual paying particular attention to the operating precautions and wiring procedure.

THOMANN MUSIKHAUS will not assume responsibility for incorrect installation or operation of this product.

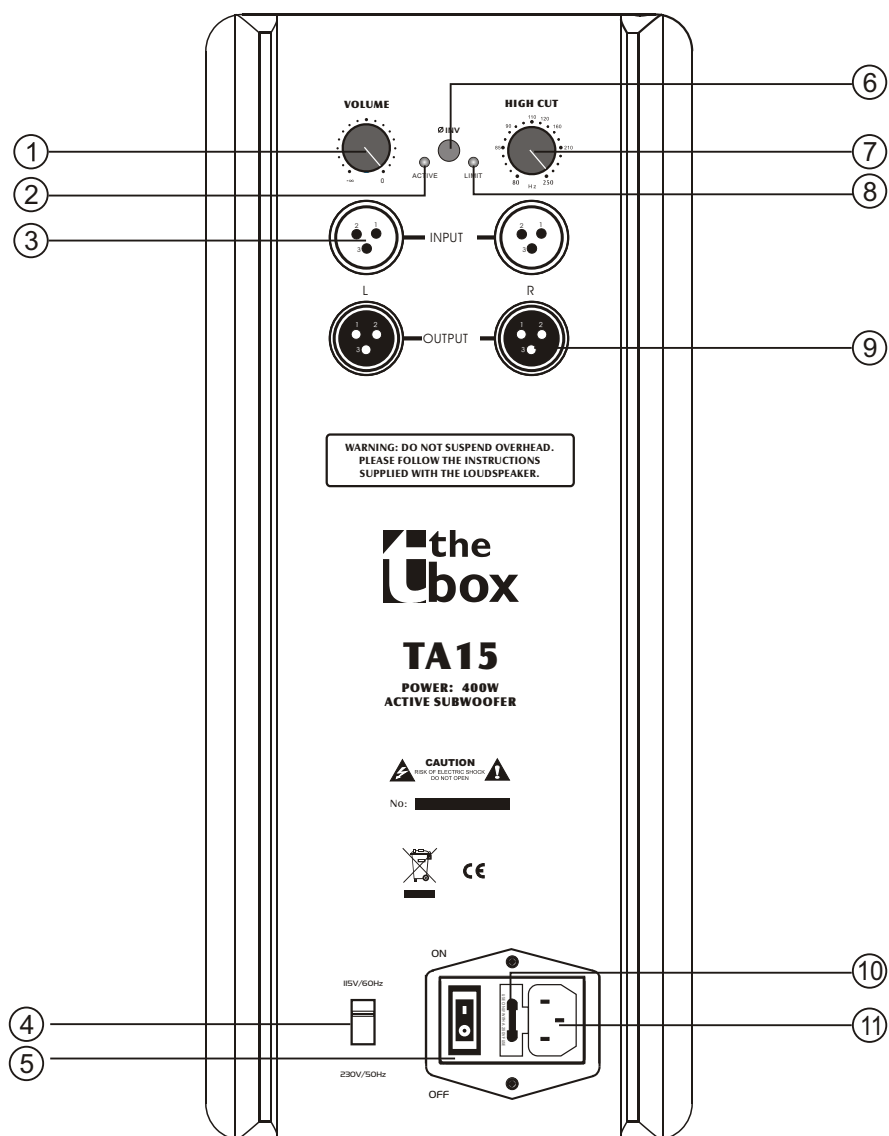

- | | |
|--|--|
| <ul style="list-style-type: none"> 1. Volume control. 2. Active indicator. 3. L/R Line input. 4. 115V/230V voltage input selector. 5. Power ON/OFF switch. | <ul style="list-style-type: none"> 8. Limit indicator. 9. L/R Line output. 10. Protection fuse. 11. Power supply input. Make sure that the voltage selector is set for your country's correct voltage. |
|--|--|

Specifications

System:	Super bass active speaker
Cabinet Colors:	Black
Driver Quantity:	15"x1(Bass)
Frequency Response(-3dB):	35Hz-250Hz
Max SPL(1m):	125dB
Rated power:	400W
THD:	<1%
Input impedance:	Balance - 20kOhm, Unbalance - 10kOhm
Connectors:	XLR, K3P, J3P
Power supply:	115V/230V, 50Hz/60Hz
Dimensions(WxHxD mm/pcs):	600×460×490mm
Packing Dimensions(WxHxD mm/pcs)	720×590×610mm
Net Weight(Kg/pcs):	34kg
Gross Weight(Kg/pcs):	40.4kg

* In the interests of product development, THOMANN MUSIKHAUS reserves the right to change and improve all specifications quoted.